

Tomorrow's Technology for Today's Application™



**Add torque
control capability
to your stepping
system!**

Design smart with ServoTrack™

ST484 STAND ALONE DRIVER AND PROGRAMMABLE MOTION CONTROLLER

Features

- HMI Interface
- USB Programming Interface
- Multifunction diagnostic LED
- SnapTrack™ Programming Software
- Secondary Encoder input for electronic gearing OR camming
- Secure screw terminal connectors
- 35 mm Din Rail or Panel mountable
- Distributed Motion for Multi-Axis Control
- Control motors from size Nema 8 to Nema 34


Specifications

Input Voltage:	12-48 VDC
Variable Control Modes:	Rotary Torque Control Linear Force Control
Current:	4 Amps/Phase RMS
Control:	Dynamic Closed Loop or Open Loop
Programmable I/O's:	3 Digital Inputs (5V-24V) 3 Digital Outputs (5V-24V) 1 16-Bit Analog Input
Microstep Resolution:	Up to 256 μ steps/step
Communication:	Serial RS232 Serial RS485

Key Benefits:

- Solve applications previously considered too demanding for stepper Systems.
- Reduce system cost with an enhanced stepper based system.
- Do you need torque control in your stepper system?
- Does your system stall due to transient loads or friction?
- Eliminate unintentional stalling or loss of synchronization.
- Increase throughput efficiency
- Reduce motor heating and energy costs with variable current control
- Optimize the torque utilization of your motor
- Greater compliance with inertial mismatch

Never
lose
position

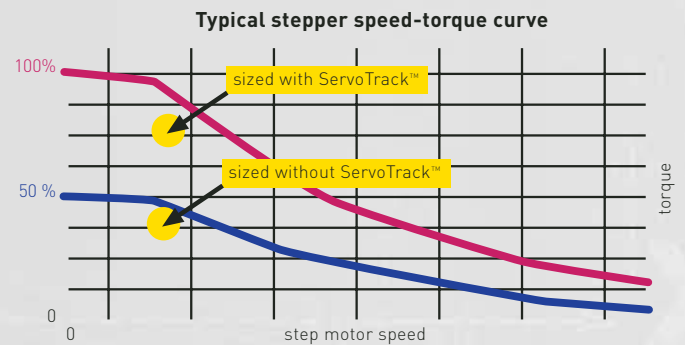

ServoTrack™ control for real-time response. It continually monitors the relationship between the rotor and stator at nano-second intervals, and will not allow that relationship to exceed the point where motor synchronization is lost.

SNAPTRACK™ PROGRAMMING



- Simple and powerful programming
- “Block” programming
Eliminates traditional “coding” and syntax learning
- Creates buttons with labels with underlying programs that can be executed with a simple click
- User-friendly software

TYPICAL PROGRAMMING BLOCKS


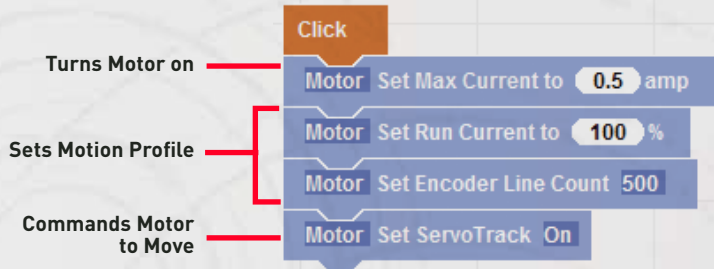


Figure 1. Push Button Block Program, Click and Set Motor



COMPUTER PROGRAMMING INTERFACE

Touchscreen programming
(optional)

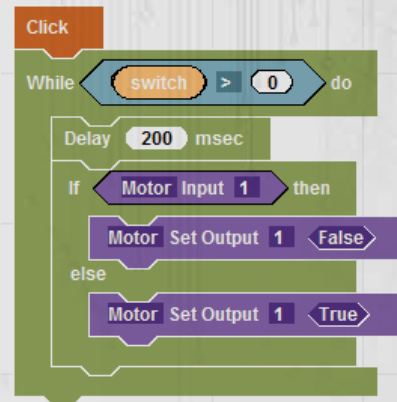

ServoTrack™

Vector Series Integrated Systems

(Driver and Programmable Motion Controller)

Variable Rotary Torque Or Linear Force Control!

Rotary torque up to 300 oz-in.

Linear Force up to 200 lbs.



Features

- Captive linear version shown. External linear and non-captive versions also available.
- HMI Interface
- USB Programming Interface
- Multifunction diagnostic LED
- SnapTrack™ Programming Software
- Secondary Encoder input for electronic gearing OR camming
- Distributed Motion for Multi-Axis Control (Master and Slave)

Specifications

Input Voltage:	12-48 VDC
Variable Control Modes:	Rotary Torque Control Linear Force Control
Current:	4 Amps/Phase RMS
Control:	Dynamic Closed Loop or Open Loop
Programmable I/O's:	3 Digital Inputs (5V-24V) 3 Digital Outputs (5V-24V) 1 16-Bit Analog Input
Microstep Resolution:	Up to 256 μ steps/step
Communication:	Serial RS232 Serial RS485

For more detailed information...

Local Sales and Support



Koco Motion US LLC | DINGS'
335 Cochrane Circle
Morgan Hill, CA 95037
Phone (+1) 408-612-4970
www.kocomotionus.com